

key features & benefits


- ▼ Efficient & powerful 4.25 HP, AC NextGEN III Eco-Drive System™ (NEMA IE3 Premium Efficiency)



- ▼ Intuitive LED with dual speed and incline toggle controls, audio input, speakers, USB port, reading rack/tablet holder and cup holders



- ▶ Simple design makes the M6 IE3 treadmill easier and more efficient to assemble, service and relocate
- ▶ Contact and wireless heart-rate sensors are compatible with a variety of industry-leading monitors
- ▶ Low step-on height and rubber foot grips with durable commercial components on a space-saving commercial frame
- ▼ 60" x 20" Siegling premium lubricant-infused running belt with 1" reversible phenolic deck provides long lasting reliability

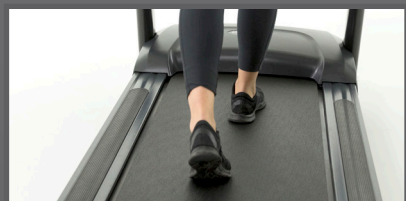

- ▶ More than 20 exercise programs and integrated 2-speed personal fan
- ▶ Illuminated power-on switch with quick-connect safety clip
- ▶ The Smooth Deck Shock Absorption System with urethane suspension delivers a stable and flexible running surface designed to provide the ultimate comfort, reducing stress on knees and joints
- ▶ Zinc-dipped anti-corrosion coating for superior rust protection

circle
FITNESS



M6 IE3 TREADMILL

CIR-TM6000IE3-C

The M6 IE3 treadmill features the NEMA IE3 Premium Efficiency Motor – the most efficient treadmill motor available – without compromising power. Paired with high quality commercial components on a space-saving frame, this treadmill is built for unparalleled durability, efficiency and comfort.

Our Most
EFFICIENT
Treadmill Ever!



technical specs

Product Weight: 302 lbs.	Running Surface: 60" x 20"	Width: 36"	Length: 78"	Height: 57"
--------------------------	----------------------------	------------	-------------	-------------


Motor: 4.25 HP, AC NextGEN III Eco-Drive™ NEMA Premium IE3

Electrical: 120V, 20 amp dedicated NEMA 5-20

Certification: UL, CSA, CE & EU MEPS

Rollers: 2.75"

Step Up Height: 7"

Belt: Siegling premium with Texglide™ technology 

Deck: 60" x 20" running surface, with 1" reversible phenolic deck

Suspension: Smooth Deck Shock Absorption System with urethane suspension

Speed Range: 0.3 - 15.5 MPH

Incline Range: 0 - 15% incline

User Weight: 450 lbs.

Transport Wheels: Easy-to-move with front-mounted dual wheels without elevating

Frame: Zinc-dipped, anti-corrosion coated heavy gauge steel

Heart Rate Receiver: Contact & telemetric heart-rate sensors

Display: 8 x 16 dot matrix console with message window + HR status bar

Display Feedback: Time, distance, heart-rate, calories, speed, incline, calories/hour, pace

Programs: 20 programs, 1 target, 3 HRC, 1 fitness test, 2 custom

Keypad: Teflon keypad TPU lasts 25% longer than PVC

Standard Features: Hand pulse, fan, heart-rate receiver chest belt compatible, 4 quick keys for both speed & incline & reading rack/tablet holder

Warranty: 10 years frame, 6 years motors & parts, 2 years wearable items, 1 year labor in light commercial applications, including hospitality, multi-family, fire/police, municipality, corporate & junior/senior high schools (up to 8 hours of daily use)

